

EGR

INSTALLATION INSTRUCTIONS

Tools Required




Clean Dry Cloth



Soap & Water



Non-Permanent Marker



NO POWER TOOLS

Cleaning Notes




- Spray with a firm water spray to remove any loose dirt.
- Wash with water, detergent and a soft cloth or sponge.
- Do not use petroleum based solvents or abrasives.

1 Wash the hood with a mild soap and water solution, then dry thoroughly. Open the hood. Trial fit the hood protector centrally onto the hood. With a non-permanent marker, note and mark the positions of the six hood protector tags and where they correspond to the hood. Remove the Hood Protector.

2 Clean the six noted areas with the alcohol wipe provided. Wipe off any residue with a dry clean cloth. Adhere the abrasive resistant tape strips over the hood lip. Apply tape so approximately half of each strip is adhered to the top side and half is adhered to the underside of hood.

3 Push the four fixed clips onto the four noted Hood Protector tags.

A definite click should be heard when the clip engages with the tag slot.

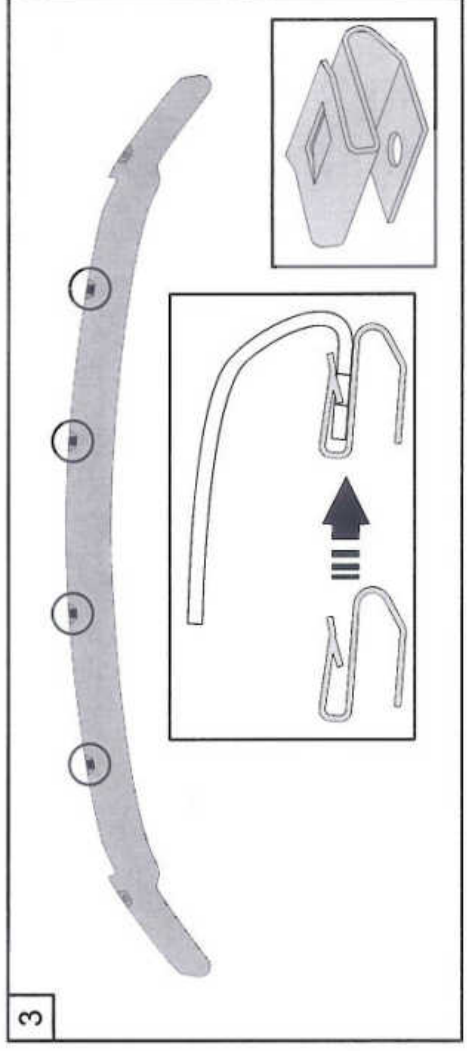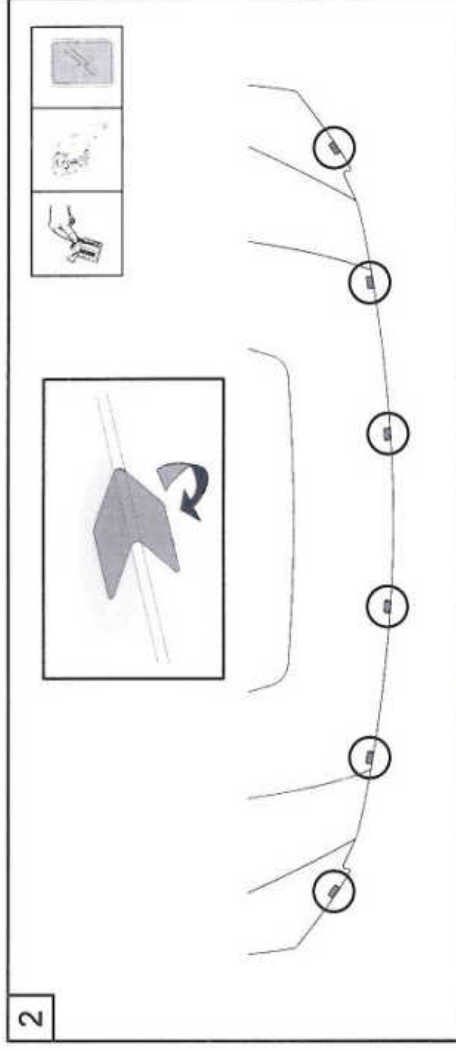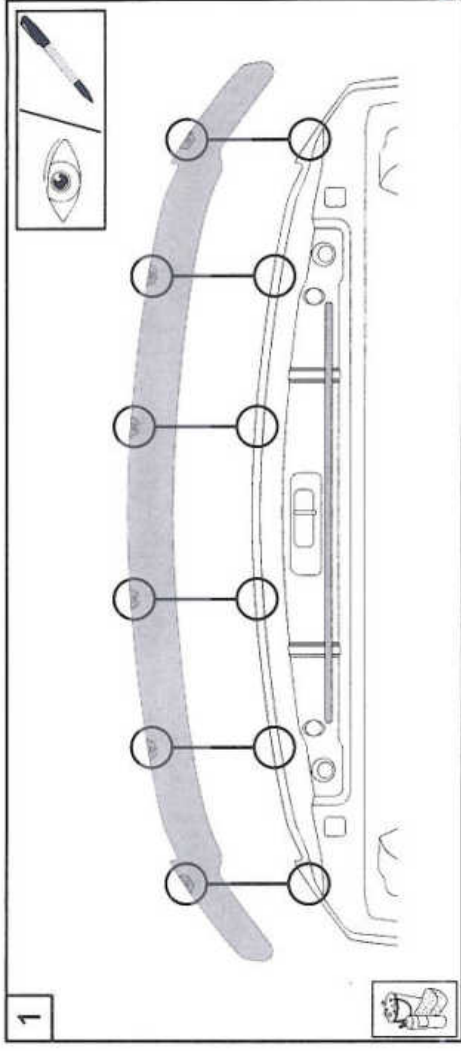

EGR

INSTALLATION INSTRUCTIONS

Tools Required



Clean Dry Cloth



Soap & Water



Non-Permanent Marker




NO POWER TOOLS

Cleaning Notes

- Spray with a firm water spray to remove any loose dirt.
- Wash with water, detergent and a soft cloth or sponge.
- Do not use petroleum based solvents or abrasives.


- 4•** Push the two wing clips onto the two noted Hood Protector tags.

A definite click should be heard when the clip engages with the tag slot.

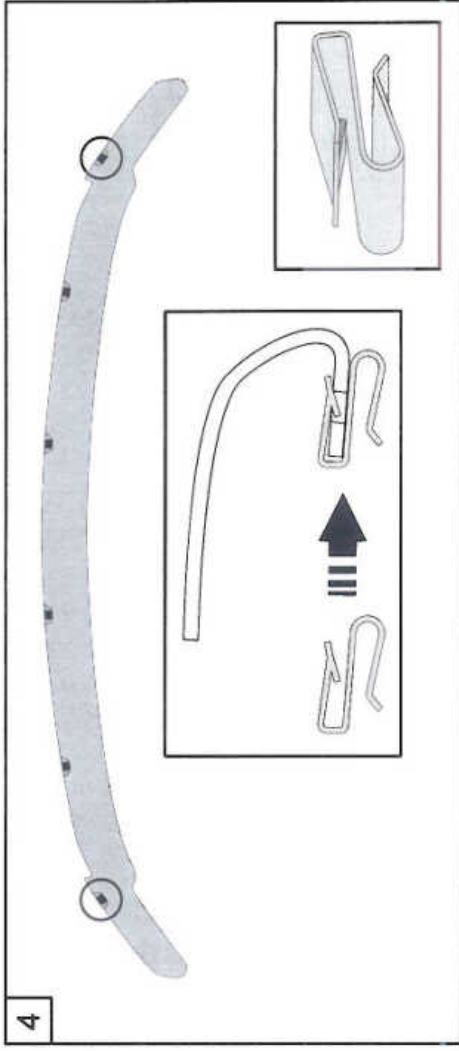

- 5•** Fit the Hood Protector centrally to hood and insert the plastic spacer between the four fixed clips and the underside of the hood. Loosely secure to the four metal clips with the small screws provided. Check the Hood Protector is centered, then fully tighten the screws.

IMPORTANT: Ensure that the clips are positioned over abrasive resistant tape and do not come in contact with any of the hood's paint work. Failure to do this may result in permanent paint damage.

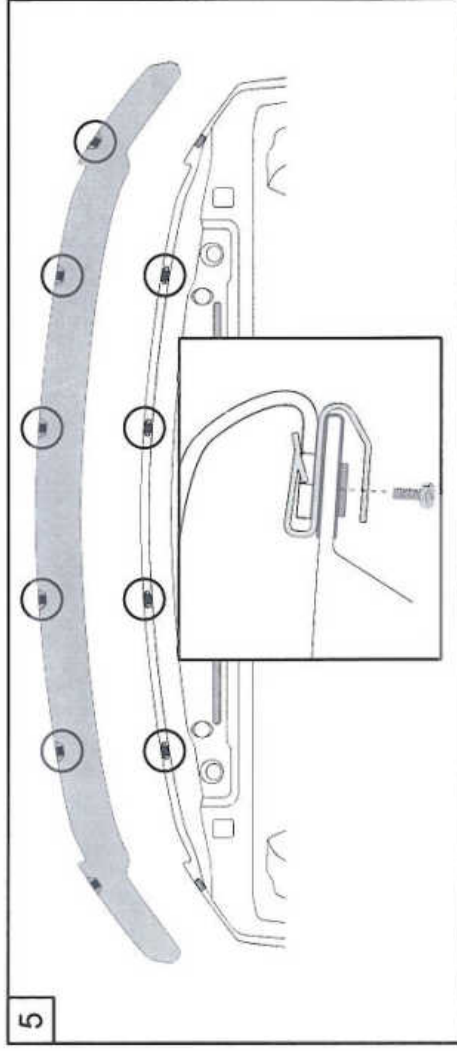

- 6•** Slide the wing clips onto the hood lip over the previously adhered abrasive resistant tape strips.

IMPORTANT: Ensure that the clips are positioned over abrasive resistant tape and do not come in contact with any of the hood's paint work. Failure to do this may result in permanent paint damage.

