

INSTALLATION INSTRUCTIONS AND PARTS LIST

MODEL: 583098, 583102, 583108, 583114, 583125, 584098, 584102, 584114, 584125 O-MEGA II 6" OVAL
STEPS
UNIVERSAL APPLICATION


1. READ INSTRUCTIONS COMPLETELY AND CHECK TO MAKE SURE THAT ALL REQUIRED PARTS (LISTED ON THE SERVICE PARTS LIST) ARE ON HAND BEFORE STARTING THE INSTALLATION.
2. FOLLOW THE INSTRUCTIONS INCLUDED WITH THE SPECIFIC BRACKET PACKAGE THAT YOU ARE USING, TO MOUNT THE BRACKETS TO YOUR VEHICLE.
3. BEFORE ATTACHING THE O-MEGA STEPS TO THE BRACKETS, PLACE THE STEP PADS (ITEM #2) ON TOP OF THE STEP PLATES. USE THE TABLE ON SHEET #2, AS A GUIDE TO POSITION THE STEP PAD FOR YOUR PARTICULAR VEHICLE. WHEN INSTALLING THE PADS ON THE STEPS, DRILL (5) 1/8" HOLE USING THE STEP PAD AS A GUIDE. ATTACH WITH (5) 8-18X1/2" TEK SCREWS (ITEM #6) PROVIDED. REPEAT FOR ALL STEP PADS. (NOTE: DUE TO THE SHORTNESS OF SOME BOXES, MOUNT THE BOX STEP PAD FIRST, APPROXIMATELY 1/2" FROM THE END CAP AND THEN MOUNT THE MIDDLE STEP PAD ACCORDINGLY.)
4. INSTALL THE REQUIRED NUMBER OF SQUARE HEAD BOLTS INTO THE DESIGNATED SLOTS IN THE BOTTOM OF THE STEP PLATES.
5. INSTALL THE END CAPS (ITEM #3) AS SHOWN IN *fig. 1*, TIGHTENING THE NUTS TO 5 LB FT.
6. POSITION THE O-MEGA STEP ON THE MOUNTING BRACKETS SO THAT THE SQUARE HEAD SCREWS (ITEM #4) ARE LOCATED IN THE SLOTS OF THE MOUNTING BRACKETS AND THE STEP IS CENTERED, FRONT TO REAR, ON THE VEHICLE. INSTALL 5/16" SERRATED FLANGE NUTS (ITEM #5) ON THE SQUARE HEAD SCREWS (ITEM #4) AND TIGHTEN TO 19 LB FT.

SERVICE PARTS LIST

ITEM	PART NO.	QTY	DESCRIPTION
1	553074	2	EXTRUSION-AL,95.0,OMEGA STP,SILVEER
1	553075	2	EXTRUSION-AL,99.0,OMEGA STP,SILVER
1	553076	2	EXTRUSION-AL,105.0,OMEGA STP,SILVER
1	553077	2	EXTRUSION-AL,111.0,OMEGA STP,SILVER
1	553078	2	EXTRUSION-AL,122.0,OMEGA STP,SILVER
1	553062	2	EXTRUSION-AL,95.0,OMEGA STP,BLACK
1	553063	2	EXTRUSION-AL,99.0,OMEGA STP,BLACK
1	553065	2	EXTRUSION-AL,111.0,OMEGA STP,BLACK
1	553066	2	EXTRUSION-AL,122.0,OMEGA STP,BLACK
2	107957	6	ALUM,STP-PAD,BLK,OMEGA-STEP
3	107956	4	CAP-END,PLSTC,2.95 X 6.70
4	106880	28	SCREW-SQ HD,5/16-18 X 1,MAGNIGUARD
5	102680	28	NUT-SERR FLG,HX,SST,WX,5/16-18
6	107958	30	SCREW-PPH,TEK,#8-18 X 1/2",SST,BZP



STEP PAD LOCATION GUIDE

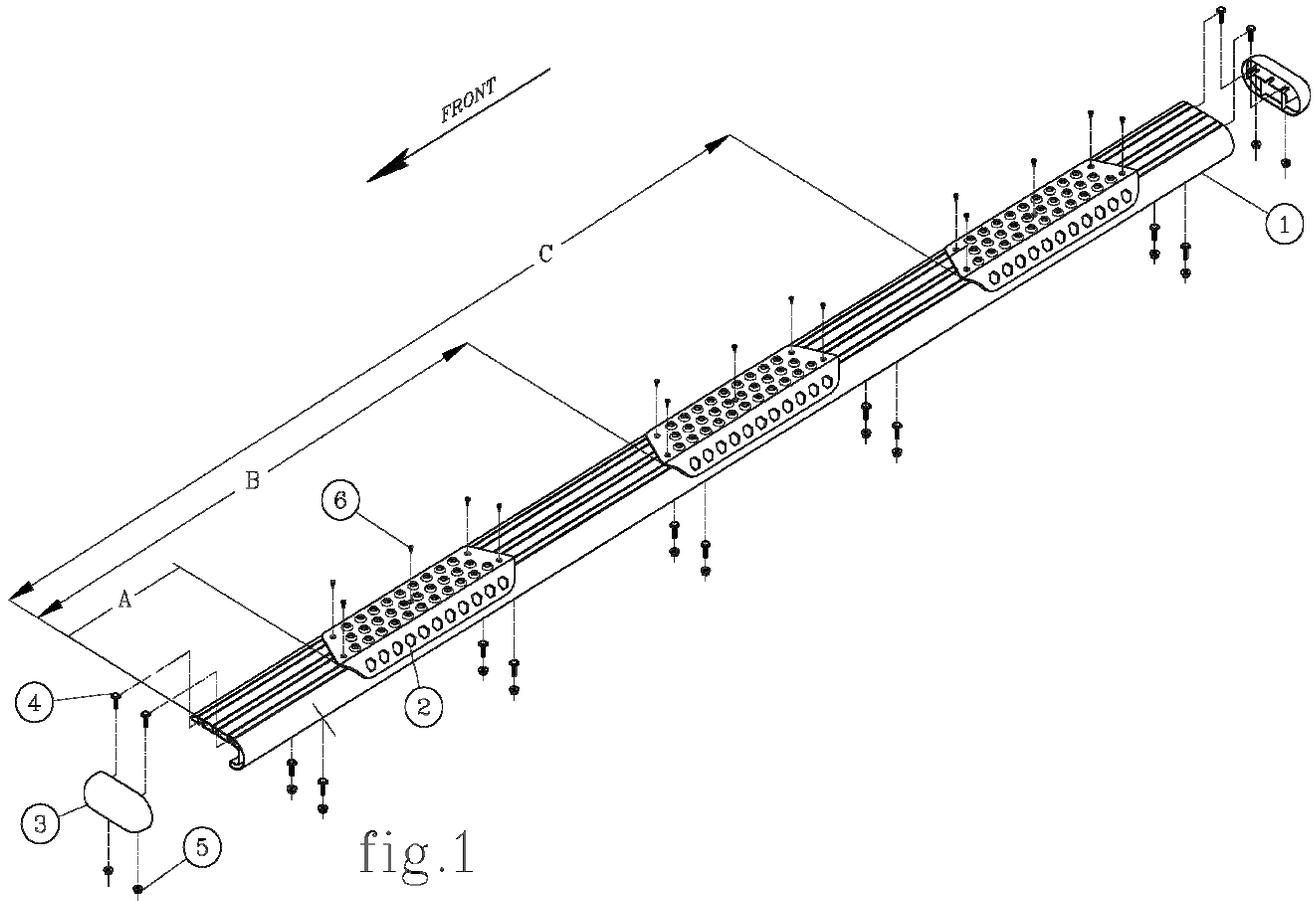


VEHICLE MODEL	PAD A	PAD B
SILVERADO/SIERRA DOUBLE CAB	14-3/4	46-3/4
SILVERADO/SIERRA EXTENDED CAB	14-3/4	41-3/4
SILVERADO/SIERRA CREW CAB	14-3/4	54-1/4
CHEVROLET EXPRESS VAN & GMC SAVANA VAN	7-1/2	N/A
RAM QUAD CAB	10-1/2	46
RAM CREW CAB	10-1/2	48
RAM MEGA CAB	10-1/2	52-1/16
FORD F150 SUPER CAB	18-1/4	46-1/4
FORD F150 SUPER CREW CAB	18-1/4	56-1/2
FORD F150 SUPER CREW CAB	18-1/4	56-1/2
FORD SUPER DUTY SUPER CAB	6-7/8	39-1/16
FORD SUPER DUTY CREW CAB	6-7/8	52-7/8
FORD	7-1/2	N/A

NOTE: THE ABOVE PAD LOCATIONS ARE ONLY SUGGESTIONS AND MAY BE PLACED AT THE PURCHASERS DISCRETION.

Step 1

Starting on the Passanger side, locate mounting locations as shown in Fig 1 and Fig 3.

Hold each bracket in its mounting locations and mark each hole on the rocker and pinch weld.

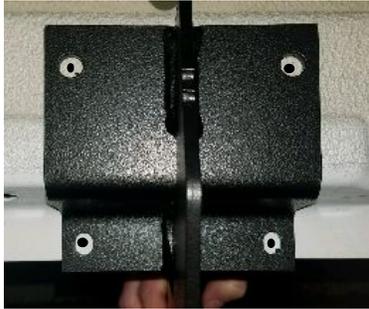

Step 2

From the under side of the plastic rocker molding use a flat head screw drive to release the bottom push pins.

NOTE: Do not remove plastic trim all the way only release the bottom push pins.



Step 3

Starting on the first bracket using a 3/32" drill bit, drill a pilot hole in each of the marked spots followed by a 3/8" drill bit.

NOTE: Place a Putty knife between the pinch weld and the plastic rocker molding to avoid damaging molding from drilling.



Step 4



Using the 3" U-Bolt put it through the top 2 mounting holes and secure with (2) plastic bolt retainer.

Slide (2) Clip Nuts on the pinch weld for the bottom mounting locations.

Slide the front mounting bracket on the U-Bolts and secure with (2) 5/16 flat washers (2) 8mm nuts on the studs, and (2) 5/16 lock washer and (2) 8mm bolts in the clip nuts.

Leave all brackets loose until the end.

Repeat for 2nd bracket

Step 5

Move to the 3rd & 4th mounting brackets, **models with factory studs** will use those as mounting locations. **Models with out factory studs** will have holes pre drilled in the rocker panel and will use the 3.75" U-Bolts with the plastic bolt retainer.



Repeat steps 3&4 for the bottom mounting Holes.

Step 6



Continue along the side of the vehicle to the 5th mounting bracket repeat steps 3, 4 for the lower mounting holes.


Insert the 8mm T-bolt weldment with a plastic retainer clip to secure it in place.

Slide the rear mounting bracket on the T-Bolts and secure with (1) 8mm nuts and (2) 8mm bolts.

NOTE: Leave all brackets loose until the end

Step 7

Moving to the driver side, locate mounting locations using Fig 2 and Fig 4.

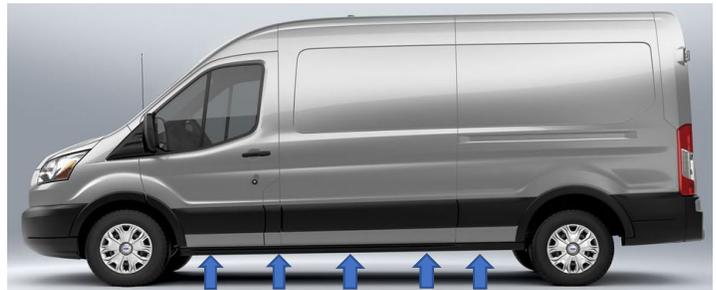

Step 8



Repeat steps 1-6 to install **1st, 3rd, 4th, and 5th**

Step 9

Assemble the AC bracket using the (2) M8 Bolts, (2) 5/16 washers, (2) M8 nuts.



Step 10



After assembling the AC bracket place along the pinch seam using Fig. 2 and Fig. 4 marking the 4 hole locations

Step 11

Drill the 2 upper holes with a 19/64 drill bit and the bottom 2 with a 3/8 drill bit

NOTE: THE 2 TOP HOLES WILL USE SELF THREADING BOLTS.



Step 12



Slide 2 clip nuts on the pinch weld for lower holes attach the AC bracket using (2) 8MM Bolts and (2) 5/16 Lock Washers on the bottom Clip Nuts and (2) 5/16 Thread Cutting Bolt and (2) 5/16 lock washers on the upper holes

Step 13

Leave ALL brackets Loose at this time. Please Review the installation instructions that are included in your step assembly for specific details. Place step board on brackets tighten all brackets so the board is level.

**PARTS LIST
FOR MOUNTING 571725 MEGA STEP BRACKETS
2015 AND NEWER FORD TRANSIT VAN**


SERVICE PARTS LIST

ITEM	PART NO.	QTY	DESCRIPTION
1	553204	3	FRONT MOUNTING BRACKET
2	553206	4	MIDDLE MOUNTING BRACKET
3	553208	2	REAR MOUNTING BRACKET
4	553211	1	AC MOUNTING BRACKET
5	553212	1	AC TOP MOUNTING BRACKET
6	101795	3	U-BOLT 3.00
7	101796	4	U-BOLT 3.75
8	107182	8	WSHR-SPCR, NYL, BLK
9	101572	16	BOLT RETAINER
10	100030	22	5/16 LOCK WASHER
11	100034	8	5/16 WASHER
12	105859	18	M8 FLANGE NUT
13	102549	22	M8 HEX BOLT
14	101566	20	M8 CLIP NUT
15	109177	2	5/16 THREAD CUTTING BOLT
16	553221	2	T-BOLT WLDMNT



SERVICE PARTS LIST

BRACKET NO. - 571725

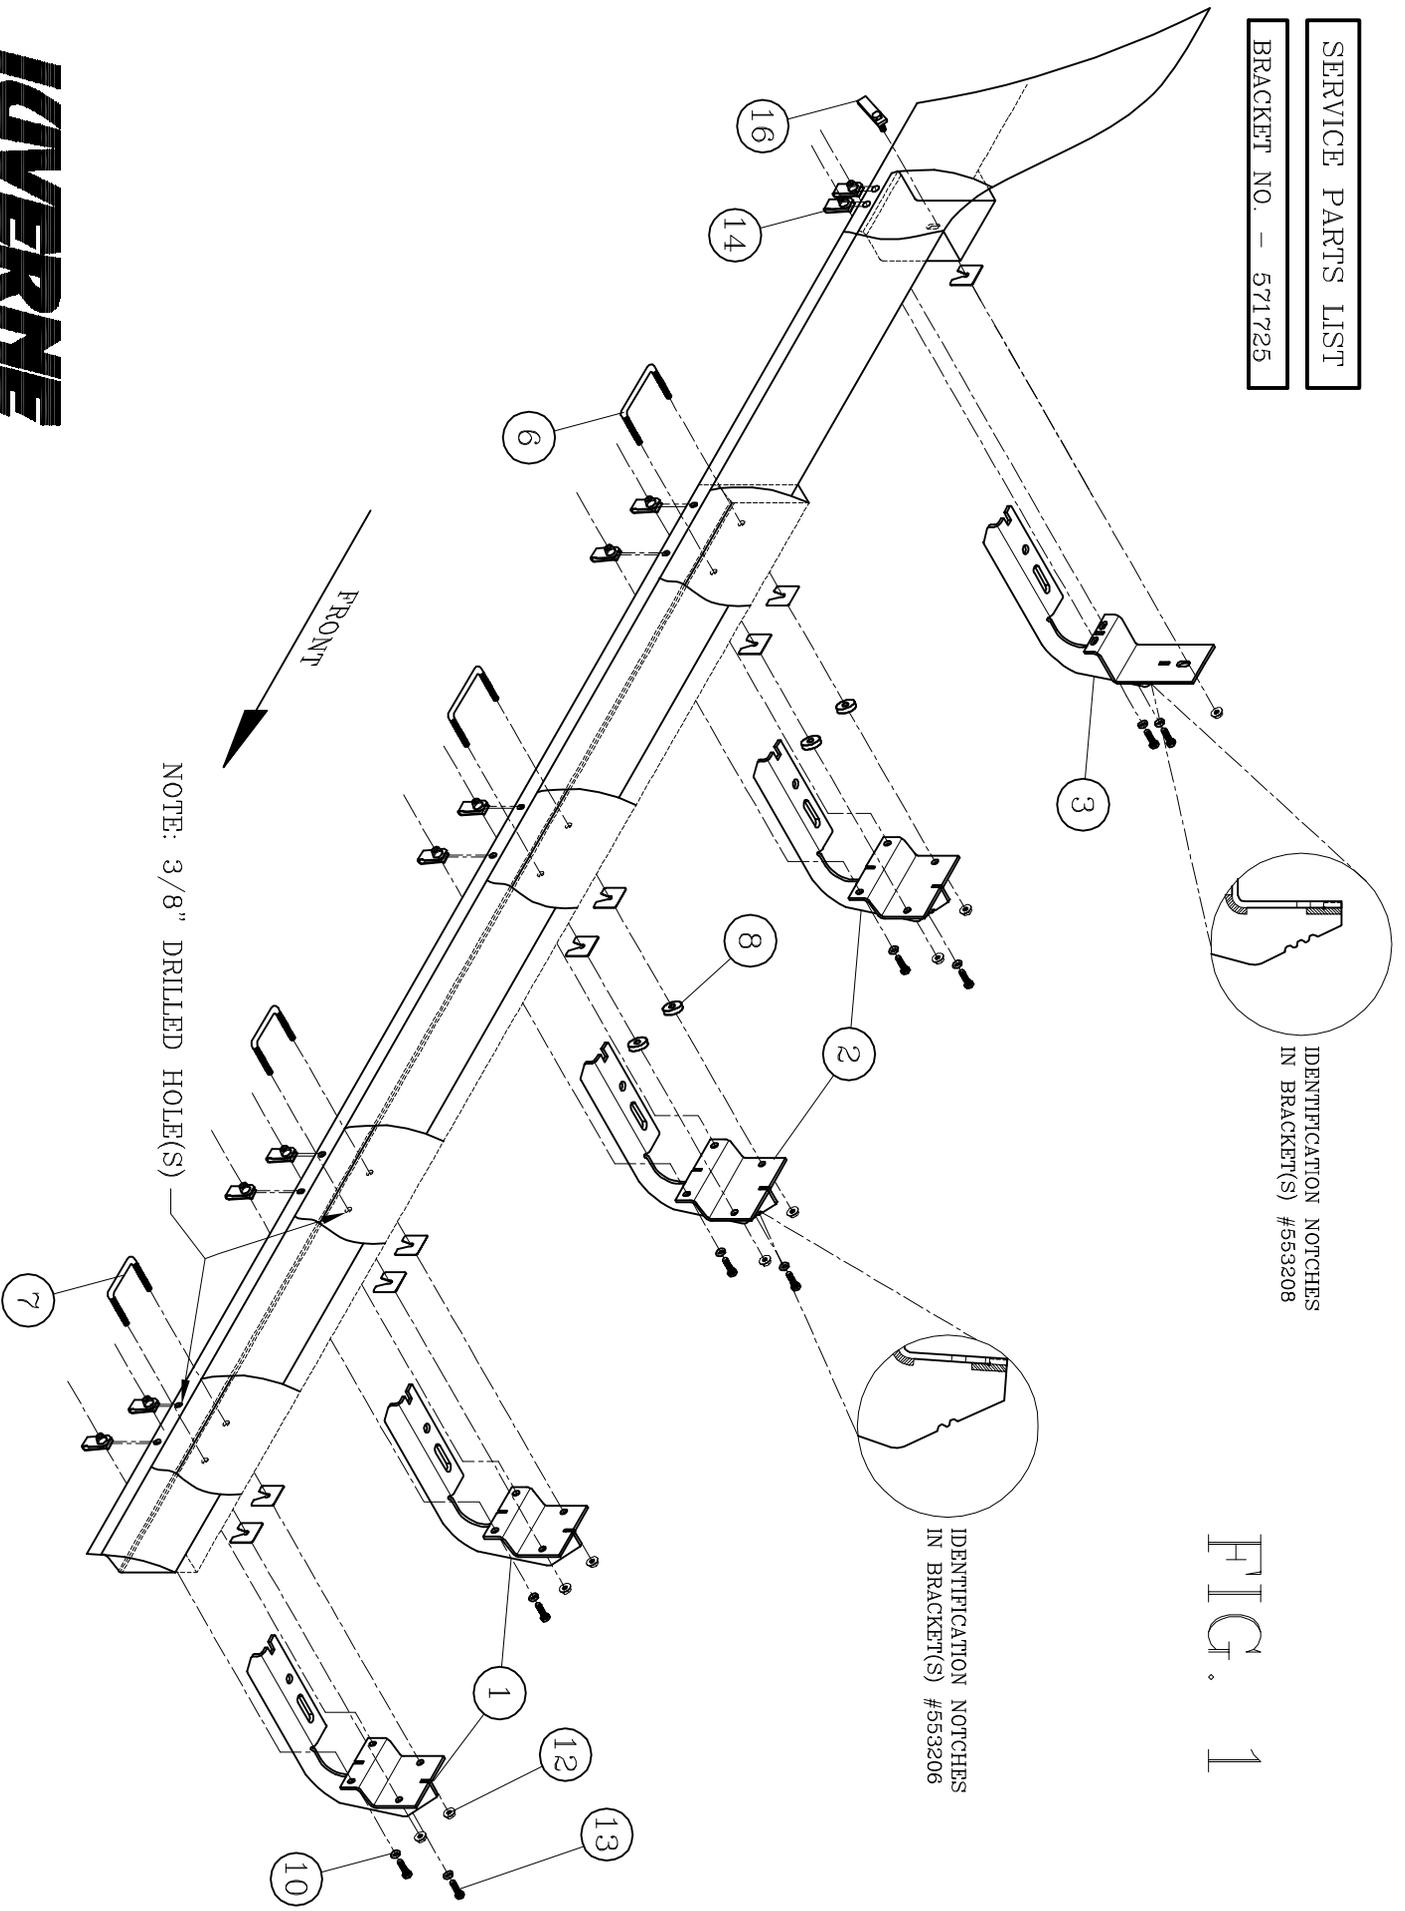

IDENTIFICATION NOTCHES
IN BRACKET(S) #553208


IDENTIFICATION NOTCHES
IN BRACKET(S) #553206

FIG. 1

NOTE: 3/8" DRILLED HOLE(S)

FRONT

-RIGHT (PASSENGER) SIDE SHOWN-




SERVICE PARTS LIST

BRACKET NO. - 571725

IDENTIFICATION NOTCHES
IN BRACKET(S) #553208

FIG. 2

IDENTIFICATION NOTCHES
IN BRACKET(S) #553206

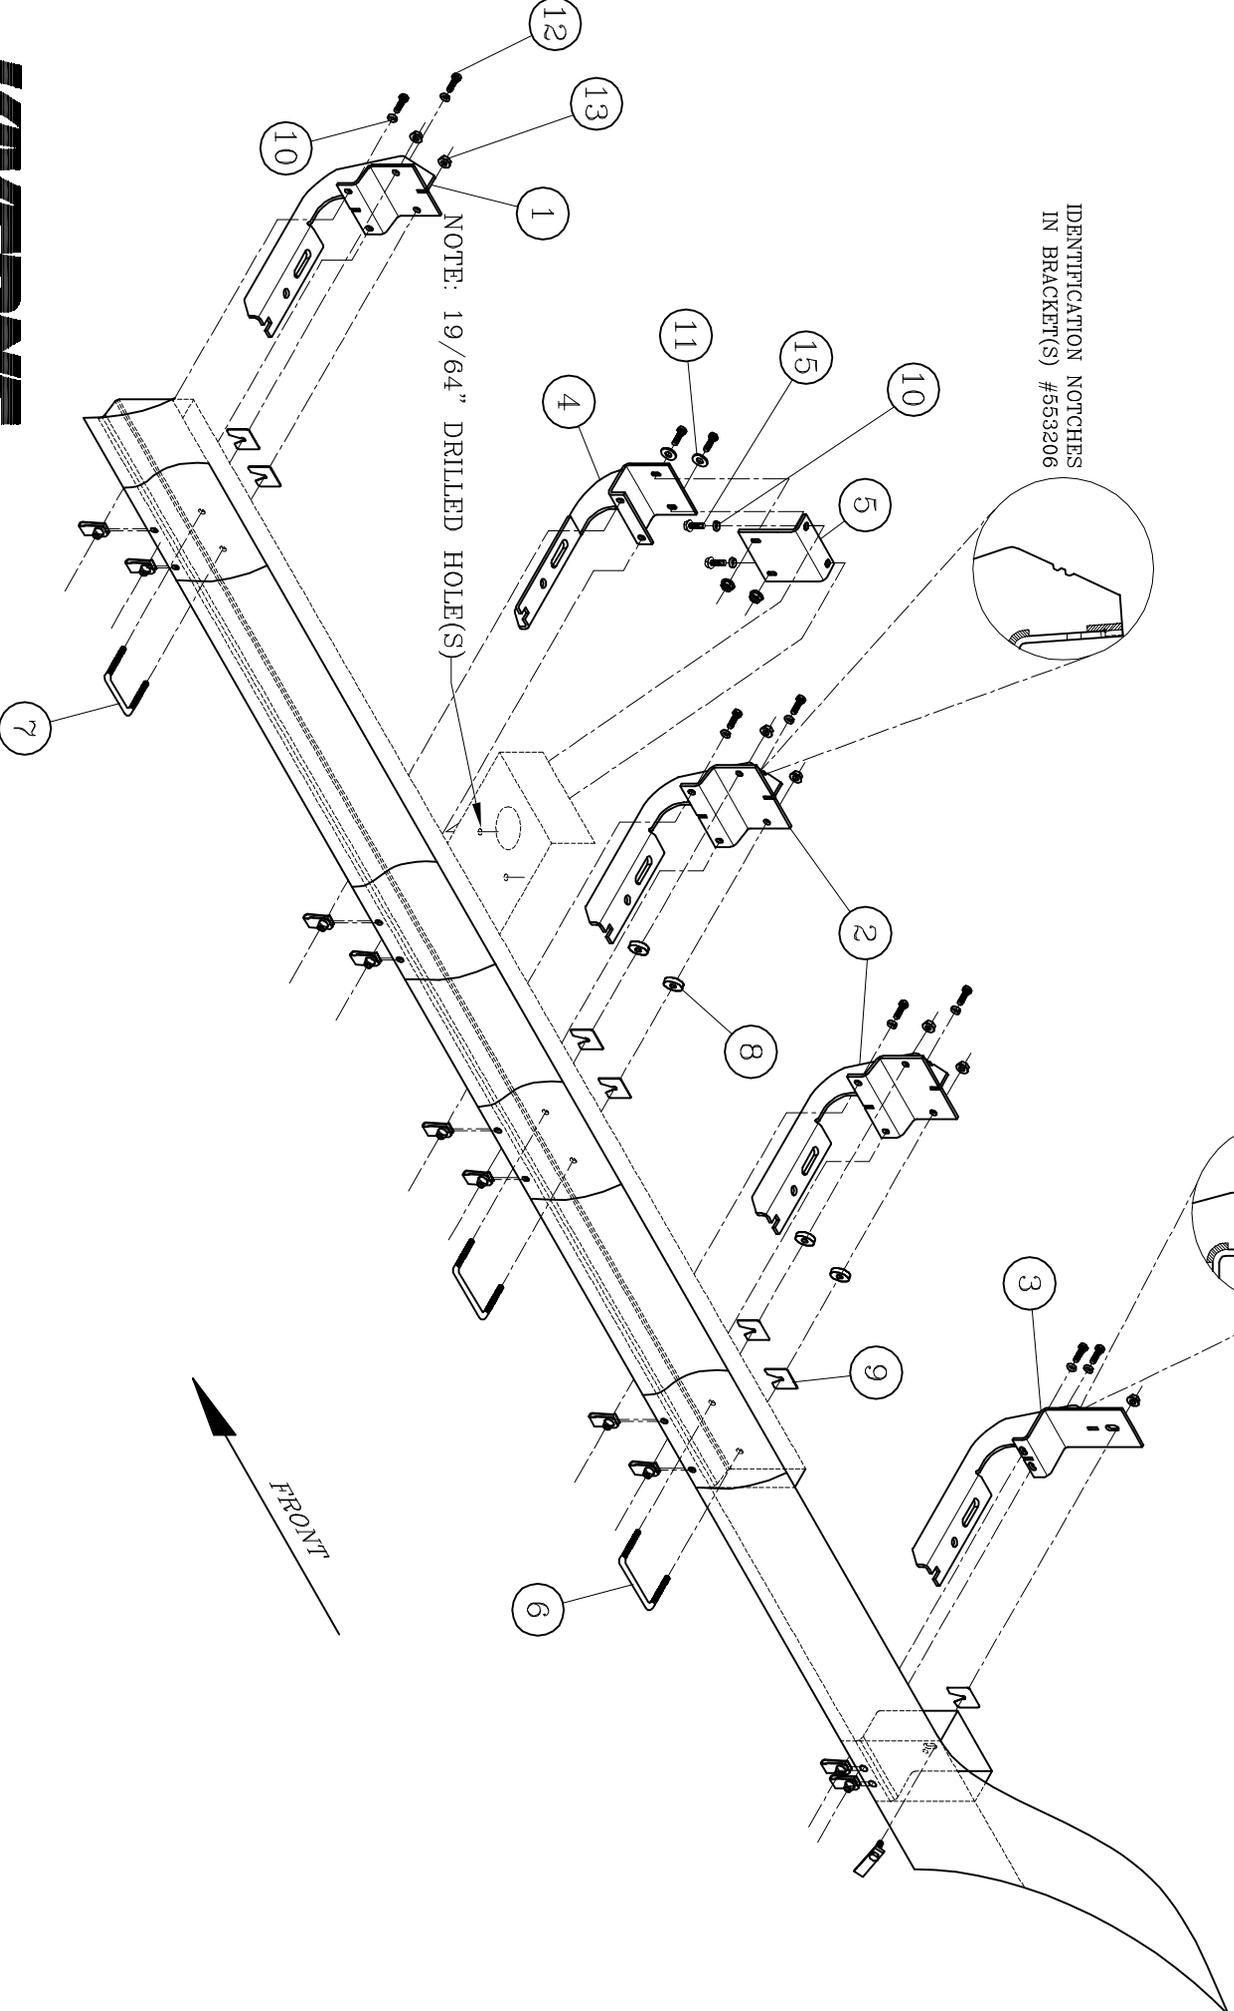


-LEFT (DRIVER) SIDE OPPOSITE-

FIG. 3

-RIGHT (PASSENGER) SIDE SHOWN-

NOTE:
THESE DIMENSIONS MAY NEED TO BE ADJUSTED FORWARD, OR BACKWARD
TO AVOID DRILLING THROUGH SPOT WELDS IN THE PINCH SEAM.

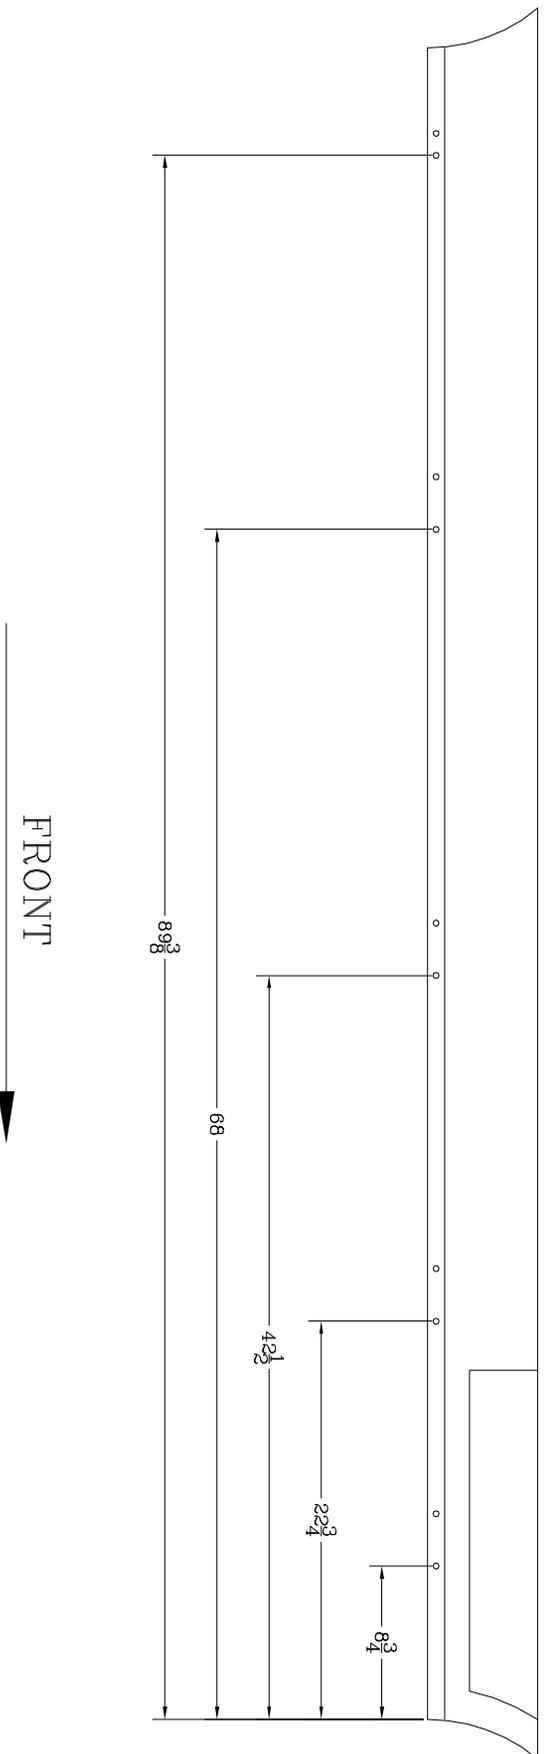

SERVICE PARTS LIST

BRACKET NO. - 571725

FIG. 4

-LEFT (DRIVERS) SIDE SHOWN-

NOTE:
THESE DIMENSIONS MAY NEED TO BE ADJUSTED FORWARD, OR BACKWARD
TO AVOID DRILLING THROUGH SPOT WELDS IN THE PINCH SEAM.

