



GATORBACK MUDFLAPS

Universal Nylon Offset Mud Flap Mounting Diagram & Instructions GN104 & GN105

IMPORTANT:

The manufacturer is not responsible for negligent use of vehicle with mud flaps installed, including over-tightening of screws and bolts causing damage to vehicle or mud flaps.

Additionally, due the variances of lifts, tires, wheels, and offsets, it is the owners responsibility to determine if this is the correct mud flap for their application.

TOOLS REQUIRED:



Electric or Re-Chargeable
1/2" or 3/8" Drill



3/8" Socket Driver

PARTS ENCLOSED: Parts Bag #770320 (Hardware) & 767490 (Caps)

(8) Tek Screw, SS, Blk Ox
1/4"-14 x 1-1/4" HWH
Part #010050



(8) Flat Washer
0.281" x 1.5" SS, Blk Ox.
Part #018087



(2) Lock Washer
1/4" Helicoil, SS
Part #024000



(2) Hex Nut
1/4-20, SS
Part #025000




(2) Capscrew, SS Blk Ox
1/4"-20 x 1.5"
Part #014074



(4) Flat Washer
0.281" x 1" SS Blk Ox.
Part #018069




(1) Nylon Cap
Driver Side
Part #080642




(1) Nylon Cap
Passenger Side
Part #080643




(1) Upper Mount
Driver Side
Part # 080760



(1) Upper Mount
Passenger Side
Part #080761



(2) Mud Flaps, Universal
Note Product may
vary dependent on
size purchased



ASSEMBLY:

1. Remove and discard the plastic strip inside the track at the bottom of the nylon upper mount.
(See Diagram #1).
2. Slide rubber guide into track of nylon upper mount.
3. Install included cap on bottom of nylon upper mount. To fully lock this cap into place, you should hear two clicks, and cap will be even with the offset part of the upper mount. (See Diagram #1).
4. Repeat Procedure for second mud flap.

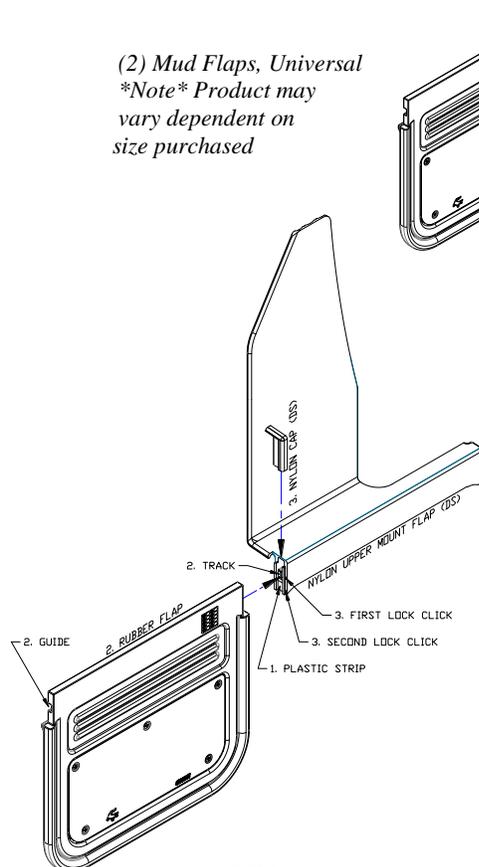


DIAGRAM #1

INSTALLATION

For ease of installation, it is suggested that the wheel be removed.

1. Before you install your Mud Flap Set, see the diagram and parts list for all necessary parts. Start on the Driver's side.
2. Tuck the offset mud flap flange underneath the bottom of the wheel well and centered to the tire.
3. Square the flap with the tire while putting pressure against the wheel well and mark the center line of the wheel well on the tire side of the mud flap.
4. Now fasten the flap with four washers and four tek screws along the wheel well.

*Optional – Install inner mud flap hole to vehicle specific bracketing (sold separately) using a capscrew and flat washer, and secure using a flat washer, lock washer, and hex nut.

5. Repeat procedure for the passenger side. Ensure all fasteners are tight.

✓ Check all fasteners for tightness. Repeat procedure on the passenger side.

