


## INSTALLATION INSTRUCTIONS 1998-09 FORD RANGER SUPER CAB 2DR / 1998-09 MAZDA SUPER CAB 2DR PART # 203035 / 203035-2

| ITEM  | QTY   | CONTENTS  | TOOLS   |
|---|---|---|---|
| 1<br>2<br>3<br>4<br>5<br>6<br>7<br>8<br>9<br>10 | 1<br>2<br>2<br>4<br>2<br>10<br>10<br>10<br>4<br>2 | Sidebar Set (Driver & Passenger)<br>Front Mounting Brackets<br>Rear Mounting Brackets<br>Rear Auxiliary Mounting Brackets<br>$\frac{1}{2} \ge 1 \frac{1}{2}$ " hex head bolt<br>M12 x 100mm hex head bolt<br>$\frac{1}{2}$ " Flat washer<br>$\frac{1}{2}$ " Lock washer<br>$\frac{1}{2}$ " Hex nut<br>M12 Hex nut | ³¼" Socket<br>18mm Socket<br>19mm Socket<br>Ratchet |

- STEP 1: Read and understand instructions completely before beginning installation.
- STEP 2: Sidebar set consists of a driver and passenger sidebar. Be sure to determine the correct side before installation.
- STEP 3: To install front mounting bracket, locate the factory bolt that is located on the floor inside the cab of the vehicle in front of driver's seat beneath the carpet. Then remove the patch that covers the bolt. Replace the factory bolt with the M12 x 100mm hex head bolt. Place front mounting bracket and secure to the bolt using ½" flat and lock washers and M12 hex nut. Leave loose.
- STEP 4: To install rear mounting bracket, place the rear auxiliary mounting bracket between the rail of chassis and the rear mounting support. Secure rear mounting bracket to auxiliary mounting bracket using ½" flat & lock washers and hex nuts. Leave hardware loose.

- STEP 5: Place the sidebar up to the mounting brackets and bolt to the mounting brackets using ½" x 1 ½" hex head bolt, flat and lock washer. Leave loose.
  STEP 6: Make any final adjustments to the alignment of the sidebar and tighten all bolts. Repeat for the opposite side.
- STEP 7: You may need to periodically re-tighten the bolts.

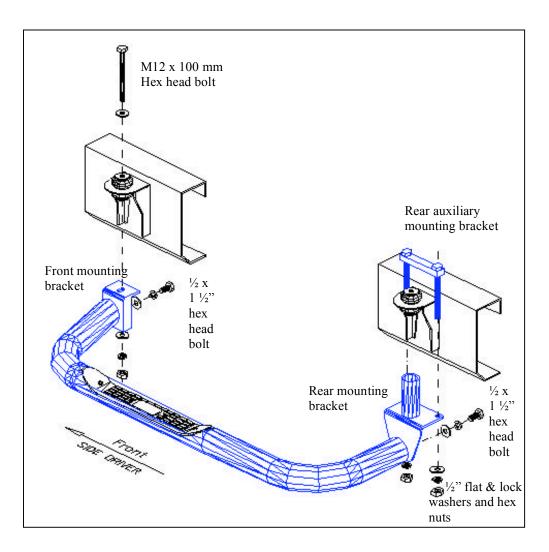

FINISH PROTECTION- ARIES PRODUCTS HAVE A HIGH FINISH THAT MUST BE MAINTAINED SUCH AS ANY OTHER HIGH FINISH PRODUCT ON THE VEHICLE. PROTECT THE FINISH WITH A NON-ABRASIVE AUTOMOTIVE WAX. THE USE OF SOAP, POLISH, OR WAX THAT CONTAINS ABRASIVES IS DETRIMENTAL, AS THE COMPOUNDS SCRATCH THE FINISH AND OPEN IT TO CORROSION.

**DISCLAIMER-** BUYER ASSUMES ALL RISK AND LIABILITY WHATSOEVER FROM THE INSTALLATION AND USE OF ARIES PRODUCTS. ARIES PRODUCTS ARE SOLD AS DECORATIVE ACCESSORIES AND SHOULD NOT BE RELIED UPON AS PROTECTION FOR THE VEHICLE OR OCCUPANTS IN THE EVENT OF A COLLISION OR ROLL OVER. ARIES AUTOMOTIVE ASSUMES NO LIABILITY FOR INJURY, LOSS, INCIDENTAL OR CONSEQUENTIAL DAMAGES IN THE EVENT OF A COLLISION OR ROLLOVER.



Aries Automotive Accessories, Inc. P.O. Box 1687 Lomita, CA 90717 Thank you for choosing Aries products For Customer Service Support please call: (888) 800-2743

2