INSTALLATION INSTRUCTIONS AND PARTS LIST MODEL 415054, 415060, GRIP STEPS (BOARDS ONLY) UNIVERSAL APPLICATIONS


- 1. Read instructions completely and check to make sure that all required parts (listed on the service parts list) are on hand before starting the installation.
- 2. Follow the instructions included with the specific bracket package that you are using to mount the brackets to your vehicle.
- 3. Step assembly:
 - 3.1 Before attaching the grip steps to the brackets, slide the appropriate number of support braces (item #2) into the channel of the step (item #1).
 - 3.2 Slide the end cap (item #3) over the front and rear of each step. Using the supplied #8 x 1/2" self drilling tek screw (item #8), screw the end cap to the bottom of the step.
- 4. Attaching the step to the mounting bracket:
 - 4.1 Set the step on the mounting brackets, and slide each support brace over the top of each mounting bracket. Attach the flat spacer plate (item #4) to the bottom of the step, between the support brace, and the top of the mounting bracket.
 - 4.2 Using the supplied 5/16-18 x 1" carriage bolt, washer, and flange nuts, (item #5, 6, 7), attach the step assembly, flat spacer plate and mounting bracket. (NOTE: Some of the flange nuts are supplied in the specific bracket package, not the step package.)
 - 4.3 Set the step plate in the correct position and tighten all fasteners. Torque all 5/16" fasteners to 19 LB FT.

ITEM	PART NO.	QTY	DESCRIPTION
1,	551954	2	EXTRUSION-AL,54, GRIP STEP,BLK,415054
1	551955	2	EXTRUSION-AL, 59.62, GRIP STEP, BLK, 415060
2	551296	4	SUPPORT BRACE, UPPER, GALV
3	551394	4	CAP-END, GRIP STEP, BLACK, PLASTIC
4	551298	4	SPACER PLATE, LOWER, BLACK
5	108683	8	BOLT-CRG,5/16-18 X 1.0", SST
6	101369	8	WASHER-FLAT,5/16,SST
7	102680	8	NUT-SERR FLG,HX,SST,WX,5/16-18
8	107958	8	SCR-TEK #8-18 X 1/2",SST,BLK

SERVICE PARTS LIST



551958 SHEET 1 OF 2 22JUL11

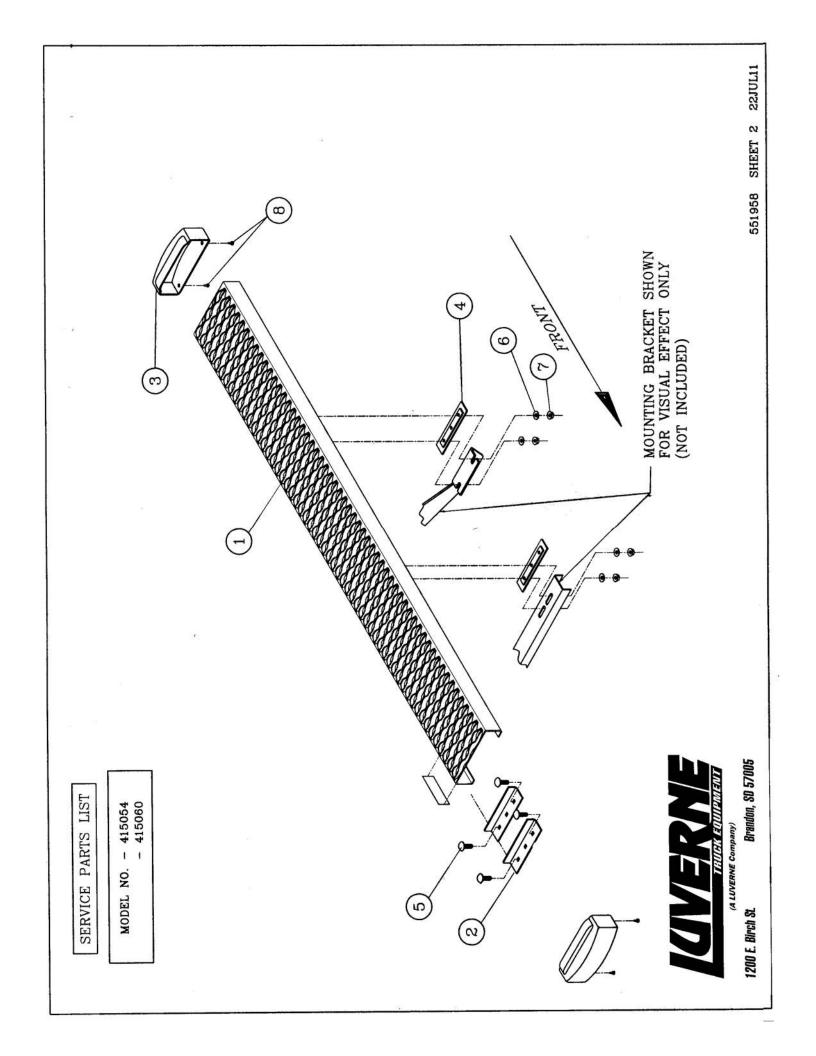

INSTALLATION INSTRUCTIONS AND PARTS LIST

APPLICATION: **MODEL 400711 STEP BRACKETS:** 2007 GM SILVERADO & SIERRA REGULAR CAB PICKUPS



- 1. READ INSTRUCTIONS COMPLETELY AND CHECK TO MAKE SURE THAT ALL REQUIRED PARTS (LISTED ON THE SERVICE PARTS LIST) ARE ON HAND BEFORE STARTING THE INSTALLATION.
- 2. ATTACH THE MOUNTING BRACKETS TO THE VEHICLE AS FOLLOWS: [SEE FIG. 1] 2.1 ATTACH THE TOP OF THE MOUNTING BRACKETS (ITEM #1) TO THE VEHICLE AS SHOWN.
 - 2.2 INSERT 5/16" MULTI-THREAD U-NUT (ITEM #7) INTO THE UPPER HOLES IN THE ROCKER PANEL (SEE FIG. 1).

(NOTE: SOME VEHICLES WILL HAVE THREADED INSERTS IN THE ROCKER PANELS, AND WILL NOT **REQUIRE THE INSTALLATION OF THE U-NUTS.**)

2.3 ATTACH THE TOP OF THE BRACKETS (ITEM #1) TO THE VEHICLE WITH 5/16-18 X 1.0 SCREW AND FLAT WASHER (ITEMS #5&4). HAND TIGHTEN ONLY.

(NOTE; IF VEHICLE HAS THREADED INSERTS AS STATED ABOVE IT WILL REQUIRE A BLACK M8 X 30MM SCREW (ITEM #3)IN PLACE OF THE 5/16-18X 1.0 SCREW.)

- 2.4 INSERT A NYLON WASHER (ITEM #2) BETWEEN THE TOP OF THE MOUNTING BRACKET AND THE BOTTOM OF THE ROCKER PANEL AND INSTALL THE BLACK M8-1.25 SCREW (ITEM#3) AND WASHER (ITEM#4) PLACE PINCH WELD SUPPORT BRACKET (ITEM #8) ABOVE PINCH WELD AS SHOWN INSTALL M8 FLANGE NUT (ITEM#6) (UNLESS THERE IS A THREADED INSERT ATTACHED TO THE VEHICLE) - THIS IS DONE ON EACH MOUNTING BRACKET. TIGHTEN ALL FASTENERS TO 19 LB FT.
- 3. ATTACHING THE STEP ASSEMBLY: PLEASE REVIEW THE INSTALLATION INSTRUCTIONS THAT ARE INCLUDED IN YOUR STEP ASSEMBLY FOR SPECIFIC DETAILS.

ITEM	PART NO.	QTY	DESCRIPTION	
PARTS INCLUDED IN THE BRACKET PACKAGE				
1	551861	4	MOUNTING BRACKET, GRIP STEPS	
2	107182	4	WASHER- SPCR, NYLON, BLK, .312 ID X 1.24 OD X .25 THK	
3	100180	8	M8 X 30 X1.25 SCR,SST,BZP	
4	106998	8	5/16" STD FLAT WASHER SST, BZP	
5	100647	4	5/16" X 1.00" SCR ZP	
6	105859	4	M8-1.25 FLANGED NUT ZP	
7	105541	4	U-NUT 5/16" - 18	
8	551666	4	BRKT-MTG,PINCH WELD SUPPORT	

SERVICE PARTS LIST



REV A 05MAR12 551970 SHEET 1 OF 2 29JUL11

1200 E. Birch St.

Brandon, SD 57005

